


**Applications:** Parker's industrial ball valve product line is intended for general purpose use. Please be aware that ball valves are intended for use in the fully open or closed positions. Depending on application conditions, throttling of the valve may result in premature seal failure and/or inability to turn the valve handle. Applications include chemical plants, refineries, steel mills, industrial fuel lines and agricultural equipment. They are ideal for corrosive environments such as chemical plants and refineries.


- Features:**
- Meets material requirements of NACE MR-01-75.
  - Cast body is manufactured from CF-8M stainless steel, the cast equivalent of 316 stainless steel.
  - Reinforced PTFE seats and seals.
  - Blow-out proof stem.
  - 316 stainless ball.

**Working Pressure and Temperature Range:** Saturated steam service rating up to 150 PSI and 400°F.

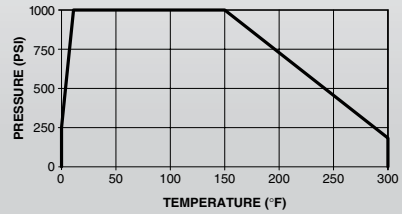

**STAINLESS STEEL BALL VALVES SERIES 502SS**

**FEMALE PIPE ENDS, PANEL MOUNT XV502SS**

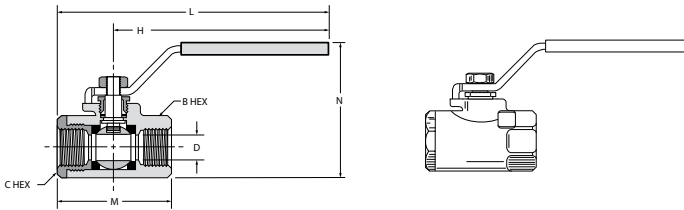

Part No.	Pipe Thread (NPT)	B/C Hex	F	G	H	I Thread	L	M	N	Flow Dia. D	Panel Hole Dia.
XV502SS-4	1/4	15/16	.500	1.125	4.00	10-24 UNC	5.03	2.07	2.52	.380	1.125
XV502SS-6	3/8	15/16	.500	1.125	4.00	10-24 UNC	5.03	2.07	2.52	.380	1.125
XV502SS-8	1/2	1-1/16	.500	1.125	4.00	10-24 UNC	5.13	2.27	2.65	.500	1.125
XV502SS-12	3/4	1-3/8	.875	1.375	5.00	10-24 UNC	6.67	3.35	3.46	.790	1.500
XV502SS-16	1	1-5/8	.875	1.375	5.00	10-24 UNC	6.77	3.54	3.74	1.000	1.500