

**Applications,
 temperature and
 pressure range:**

Intended for use with a 97C hose clamp, similar type clamp or a crimped ferrule.
 Temperature and working pressure ranges from -40° to +160°F at 150 PSI maximum.

Features:

- All Parker hose barb fitting pipe threads are made to Dryseal standards.
- Machined from CA 360 or CA 345 brass.


Assembly Instructions:

1. Cut hose cleanly and squarely to length.
2. Slide clamp on hose.
3. Lubricate hose. Push hose on fitting until hose bottoms against stop or hex.
4. Position hose clamp as shown and secure with a screwdriver or wrench. Maintain "A" dimension noted below for proper clamp positioning.

Hose Size (in.)	Hose Clamp	A (in.)
3/16	97 HC-3	1/4
1/4	97 HC-3	1/4
5/16	97 HC-6	1/4
3/8	97 HC-6	1/8
1/2	97 HC-8	1/8
5/8	97 HC-12	1/8
3/4	97 HC-12	1/8

BEADED HOSE BARB TO MALE PIPE

SERIES 68HB

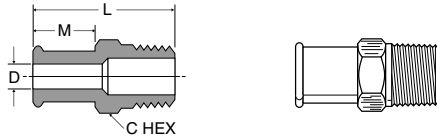

Part No.	I.D. Hose Size	Pipe Thread	C Hex	L	M	Flow Dia. D
68HB-6-6	3/8	3/8	11/16	1.53	.78	.281
68HB-8-6	1/2	3/8	11/16	1.53	.78	.406
68HB-10-6	5/8	3/8	3/4	1.62	.88	.501
68HB-10-8	5/8	1/2	7/8	1.92	.88	.501
68HB-12-12	3/4	3/4	1-1/16	2.04	.97	.625
68HB-16-12	1	3/4	1-1/8	2.12	1.00	.750