

**Applications,  
 temperature and  
 pressure range:**


Intended for use with a 97HC hose clamp or crimped ferrule. Temperature and working pressure ranges from +35° to +100°F at 75 PSI maximum or the maximum working pressure of garden hose (not to exceed 150 PSI).

**Features:**

- All pipe fitting pipe threads are made to Dryseal standards.
- Connectors, unions, nuts and extruded elbows and tees are machined from CA 360 or CA 345 brass.

**MALE HOSE TO MALE PIPE**

**SERIES 69GH, 70GH, 71GH**




Part No.	Hose Thread	Pipe Thread	C Hex	L	Flow Dia. D
69GH-12-6	3/4	3/8	1-1/16	1.25	.406
70GH-12-8	3/4	1/2	1-1/16	1.39	.531
71GH-12-12	3/4	3/4	1-1/16	1.41	.750

**MALE HOSE TO MALE HOSE**

**SERIES 75GH**

10

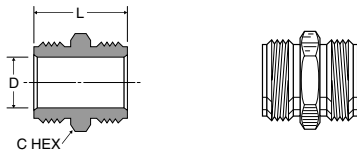

Part No.	Hose Thread	C Hex	L	Flow Dia. D
75GH-12	3/4	1-1/16	1.25	.750