


INDUSTRIAL INTERCHANGE NIPPLES

PUSH-LOK HOSE BARB**

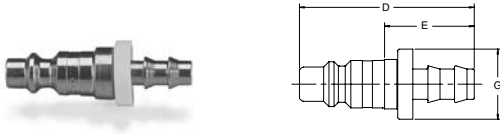

Body Size (in.)	Part No. Brass	Part No. Steel	Hose I.D.	Overall Length (in.) D	Exposed Length* (in.) E	Largest Diameter (in.) G	Wt.(LB.) P/Piece
1/4	BH8CP	H8CP	1/4	1.74	0.97	.046	0.04
1/4	-	H9CP	3/8	2.08	1.31	0.86	0.05
3/8	-	H4EP	1/4	1.87	0.92	0.59	0.06
3/8	-	H5EP	3/8	2.02	1.07	0.59	0.07
3/8	-	H6EP	1/2	2.31	1.37	0.97	0.09
1/2	-	H4FP	3/8	2.52	1.27	0.86	0.11
1/2	-	H5FP	1/2	2.66	1.42	0.97	0.11

*This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 20 Series coupler.
 **Push-Lok hose barbs are designed for use with Parker Push-Lok hose and do not require clamps.