


Description: Parker flow controls are designed for mounting directly onto the cylinder ports to provide precise control of piston rod speed. Due to their compactness, they are particularly suitable for applications where space is at a premium.

- Features:**
- Direct Mounting
 - Compact
 - Positional
 - Optimum flow control
 - Swivel outlet for use where access is restricted

Valve Specifications: Maximum Working Pressure: 145 PSI
 Operating Temperature: -10° to 200°F
 Body Material: Brass black epoxy coated
 Bolt Material: Brass

RIGHT ANGLE FLOW CONTROL VALVES


FLOW CONTROL WITH PUSH-IN CONNECTION FC701

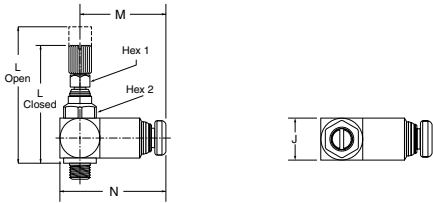

Part No.	Tube Size	Thread Size	Hex 1	Hex 2	L Open	L Closed	N	M	J
FC701-4-2	1/4	1/8	5/16	5/8	2.181	2.000	1.361	0.992	0.679
FC701-4-4	1/4	1/4	5/16	5/8	2.566	2.318	1.381	1.011	0.679
FC701-6-4	3/8	1/4	5/16	5/8	2.566	2.318	1.507	1.138	0.679
FC701-6-6	3/8	3/8	5/16	13/16	3.157	2.696	1.677	1.177	0.984

RIGHT ANGLE FLOW CONTROL VALVES

FLOW CONTROL WITH THREADED CONNECTION FC702

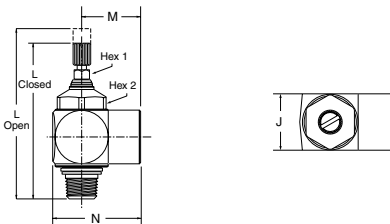

Part No.	Male Pipe	Female Pipe	Hex 1	Hex 2	L Open	L Closed	N	M	J
FC702-4	1/4	1/4	5/16	5/8	2.566	2.318	1.274	0.905	0.679
FC702-6	3/8	3/8	5/16	13/16	3.157	2.696	1.535	1.043	0.984