


Description: Parker In-Line Flow Controls are unidirectional flow control valves. In-Line Flow Control Valves are designed to mount on the piping between the directional valve and the cylinder or can be mounted on the control panel next to the other control units. They can be added to the existing circuitry, simply splice it into the cylinder port line.

- Features:**
- Full flow in both directions
 - Assembly in banks
 - Panel mounting
 - Allows other function fittings to be mounted on a cylinder
 - Space saving
 - Weight saving
 - Flexibility

Valve Specifications:
 Maximum Working Pressure: 145 PSI
 Operating Temperature: +5° to +150°F
 Body Material: High resistance polyamide
 Adjustment Screw Material: Brass

IN-LINE FLOW CONTROL VALVES

IN-LINE FLOW CONTROL WITH PUSH-IN CONNECTION FC800

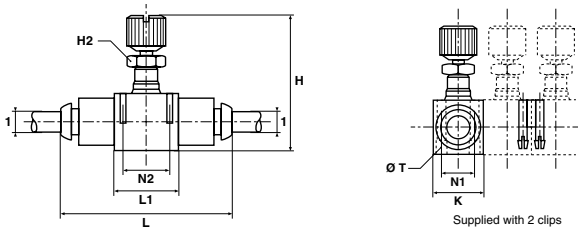

| Part No. | 1 OD | H Min. | H Max. | L | L1 | K | N1 | N2 | T | Orifice | H2 (MM) |
|------------|------|--------|--------|------|------|-----|-----|------|-----|---------|---------|
| FC800-5/32 | 5/32 | 1.15 | 1.31 | 1.52 | .59 | .47 | .31 | .43 | .09 | .12 | 5 |
| FC800-4 | 1/4 | 1.54 | 1.74 | 2.11 | .90 | .66 | .43 | .66 | .12 | .16 | 8 |
| FC800-6 | 3/8 | 2.03 | 2.38 | 2.96 | 1.29 | .94 | .62 | 1.01 | .16 | .31 | 14 |