

General Description: Parker HF Series Pneumatic Quick Couplings offer an alternative to traditional industrial interchange couplers. The quality and durability you have come to expect from Parker 20 Series couplers, combined with a slim profile and push-to-connect design. The result is an easy to use general purpose pneumatic coupler suitable for use in a variety of applications.

- Features:**
- Parker HF couplers feature sleeve guards** to protect against accidental disconnection.
 - Standard couplers feature solid brass construction, high flow valving, corrosion resistant valves, and stainless steel locking balls and valve spring.
 - Parker HF couplers accept Industrial Interchange nipples*** manufactured by Parker and other manufacturers.

*** 1/8" couplings have no standard industry interface.
 ** 1/8" couplings do not incorporate an integral sleeve guard.

GENERAL PURPOSE - PUSH-TO-CONNECT


HF SERIES INDUSTRIAL INTERCHANGE



Specifications

Body Size (in.)	1/8	1/4	3/8	1/2
Rated Pressure (psi)	250	300	300	300
Temperature Range (Std. seals)	-40° to +250° F.			
Locking Device	5 balls	4 balls	6 balls	8 balls
Vacuum Data (inches Hg)	Not recommended			
Disconnected (coupler only)	-	27.4	27.4	27.4
Connected	-	-	-	27.4

How To Order

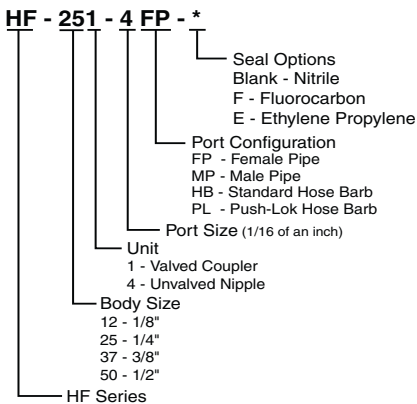

Performance

