


METERING VALVES

NL SERIES

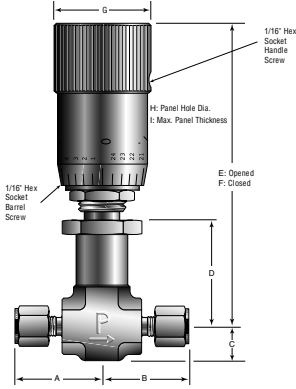

Model Shown: 6A-NLL-EPR-B-V

Note:

For K & KS Handles on in-line pattern valves:

E = 2.92", F = 2.67"
G = 0.50", H = 0.58"
I = 0.19"

For K & KS Handles on angle pattern valves:

E = 2.83", F = 2.58"
G = 0.50", H = 0.58"
I = 0.27"

For V Handles on in-line pattern valves:

E = 3.33", F = 3.08"
G = 0.84", H = 0.58"
I = 0.19"

For V Handles on angle pattern valves:

E = 3.24", F = 2.99"
G = 0.84", H = 0.58"
I = 0.27"

Part No.	End Connections		Dimensions			
	(Inlet) Port 1	(Outlet) Port 2	A* (In.)	B* (In.)	C (In.)	D (In.)
2F-NLL	1/8" Female NPT		0.93	0.93	0.41	1.56
2F-NLA	1/8" Female NPT		0.93	0.93	0.41	1.07
4A-NLL	1/4" Compression A-LOK®		1.16	1.16	0.41	1.56
4A-NLA	1/4" Compression A-LOK®		1.16	1.16	0.41	1.07
4M-NLL	1/4" Male NPT		0.93	0.93	0.41	1.56
4M-NLA	1/4" Male NPT		0.93	0.93	0.41	1.07
4V-NLL	1/4" VacuSeal		1.03	1.03	0.53	1.56
4Z-NLL	1/4" Compression CPI™		1.16	1.16	0.41	1.56
4Z-NLA	1/4" Compression CPI™		1.16	1.16	0.41	1.07
6A-NLL	3/8" Compression A-LOK®		1.24	1.24	0.41	1.56
6Z-NLL	3/8" Compression CPI™		1.24	1.24	0.41	1.07

* For CPI™ and A-LOK®, dimensions are measured with nuts in the finger tight position.