


PRESSURE SWITCH

P01908

Features:

- Inline mounting
- 5 amp rated snap action micro switch
- Brass body
- Nitrile diaphragm
- Brass housing
- Compact size
- Flying leads electrical connection
- IP65 Rated
- Field adjustable 25-100 PSIG
- +/- 2% repeatability
- Single pole / Double throw switch

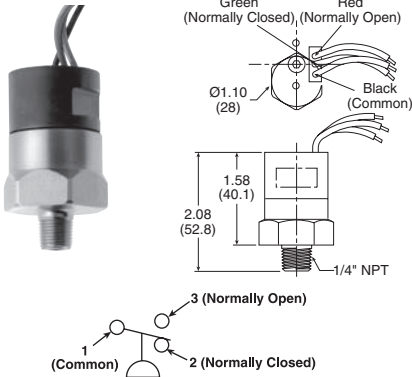

SPECIFICATIONS:

Electrical	5 AMP, 12/24VDC, 125/250VAC
Maximum Inlet Pressure	300 PSIG
Mechanical Life	2x10 ⁶ at 75 PSIG
Electrical Connection	18" Flying Leads
Electrical Protection	IP65
Repeatability	±2% at 70°F Ambient
Temperature Range	-40°F to 180°F
Weight	0.23 lb.

KITS AND ACCESSORIES:


Bushing 1/4" to 3/8"	209P-6-4
Bushing 1/4" to 1/2"	209P-8-4

PRESSURE SWITCH

SERIES P01909

Features:

- Inline mounting
- Dial indicator for easy pressure setting
- 5 amp rated snap action micro switch
- Heavy duty Aluminum components
- Compact size
- Din 43650HCM connector
- IP65 Rated
- Field adjustable 30-150 PSIG
- +/- 2% repeatability
- Single pole / Double throw switch
- Nitrile diaphragm
- Anodized Aluminum housing

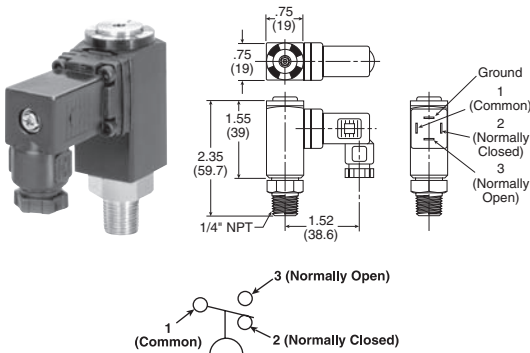

SPECIFICATIONS:

Electrical	5 AMP, 12/24VDC, 125/250VAC
Maximum Inlet Pressure	300 PSIG
Mechanical Life	10 ⁶ at standard operating conditions
Electrical Connection	DIN 43650HCM
Electrical Protection	IP65
Repeatability	±2% at 70°F Ambient
Temperature Range	-40°F to 180°F
Weight	0.13 lb.

KITS AND ACCESSORIES:

Bushing 1/4" to 3/8"	209P-6-4
Bushing 1/4" to 1/2"	209P-8-4