

**Applications and
 pressure range:**


Both external and internal-seat drain cocks are manufactured to the highest quality standards. Hand-tightening provides a metal-to-metal seal. Economical ground plug shutoff valves are available in several styles. Ground plug shutoffs are designed to withstand 30 PSI working pressure. Drain cocks are designed to withstand 150 PSI working pressure, except where noted. Note: system temperature and the type of tubing used should be considered. See specific part number for temperature range.

Features:

- Brass castings or forged bodies provide extra strength in ground plug shutoff valves.

GROUND PLUG SHUTOFF


SERIES V402P

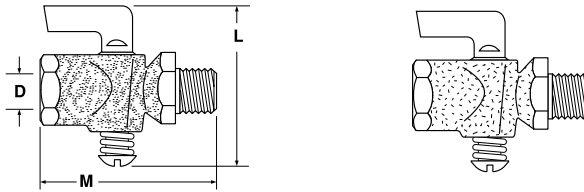

Part No.	Female Pipe Thread	Pipe Thread	L	M	Flow Dia. D
V402P-2-2	1/8	1/8	1.89	1.73	.218
V402P-4-4	1/4	1/4	1.88	2.26	.218

THREE-WAY VALVE

SERIES V406P

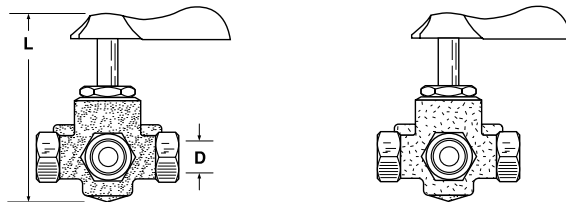

Part No.	Pipe Thread	L	Flow Dia. D
V406P-4	1/4	3.10	.281