



STRAIGHT THREAD O-RING SEAL MALE CONNECTOR³




S Straight Thread Size	Part No.	C (in.)	D (in.)	E (in.)	E1 (in.)	F Hex Flat (in.)	H (in.)	Uniform O-Ring Size	Working Pressure psig
9/16-18	4-6 VHOA-SS	0.39	0.25	0.18	0.28	3/4	1.33	Fluorocarbon 906	4500
7/8-14	8-10 VHOA-SS	0.50	0.4	0.28	0.59	1	1.66	Fluorocarbon 910	3500
9/16-18	8-6 VHOA-SS	0.39	0.39	0.28	0.28	15/16	1.48	Fluorocarbon 906	3500

TUBE BUTTWELD BULKHEAD CONNECTOR



T Tube O.D. Size	Part No.	B (in.)	C (in.)	E (in.)	E1 (in.)	F Hex Flat (in.)	F1 Hex Flat (in.)	H (in.)	Panel Hole Size (in.)	Max. Panel Thickness	Working Pressure psig	
1/4	4-4 T3H2BV-*	1.95	0.75	0.99	0.18	0.22	3/4	3/4	1.95	19/32	0.13	5100
1/4	4-4 T3H2BV-*	2.36	0.75	1.30	0.18	0.22	3/4	3/4	2.36	19/32	0.44	5100

UNION CROSS

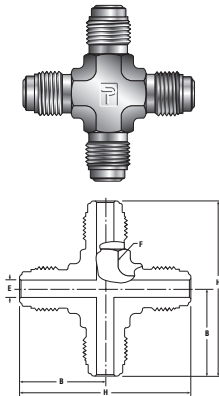

Size	Part No.	B (in.)	E (in.)	H (in.)	F Wrench Flat (in.)	Working Pressure psig
1/8	2 KV-SS	0.89	0.09	1.78	7/16	9000
1/4	4 KV-SS	1.13	0.25	2.25	9/16	8000
1/2	8 KV-SS	1.45	0.41	2.90	7/8	3500
3/4	12 KV-SS	1.92	0.62	3.84	1 1/4	3000
1	16 KV-SS	2.00	0.87	4.00	1 5/8	2400

¹ Uses 2 BV-SS and 2 BVI-SS nuts
² May contain internal transitions
³ O-rings fluorocarbon is standard. Contact local Parker representative for other available materials